


P/N
WD #


Item 1
Color: White
Size: Font: 8
Style: Times New Roman

Print Revision			
REV LETTER	Description	Date	Approval
A	INITIAL RELEASE	2024.3.1	NJ

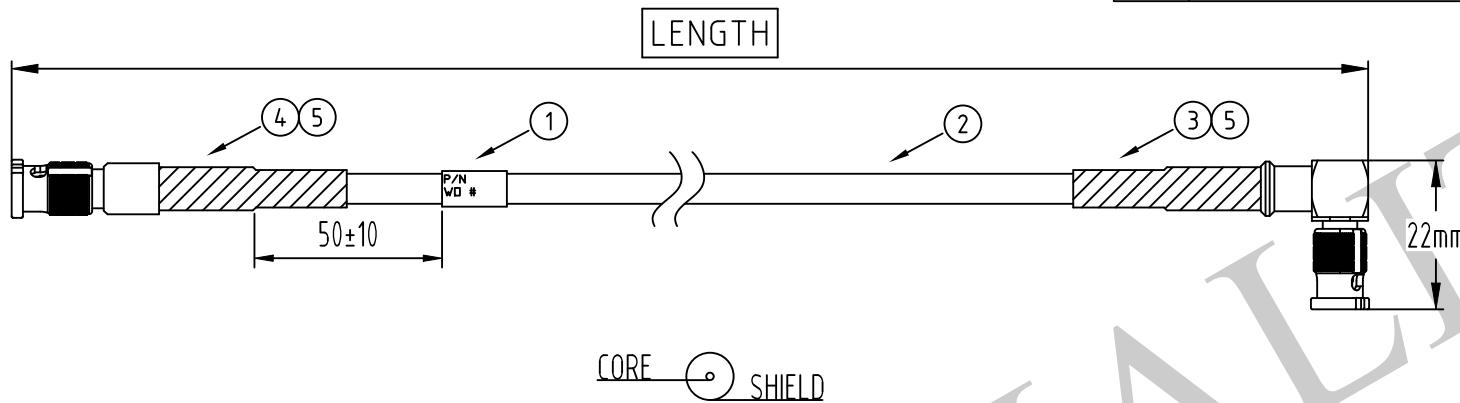

PART NUMBER	LENGTH
HF-CXP2-5.0-P-RA	5000mm
HF-CXP2-7.0-P-RA	7000mm

Cable label marking

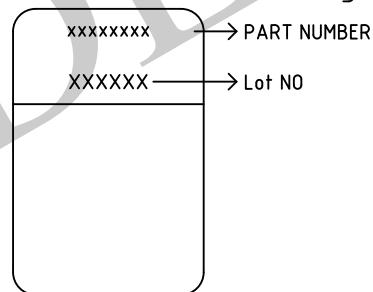

- ① LABEL
- ② COAX CABLE
- ③ HDBNC PLUG RIGHT ANGLE CONNECTORS
- ④ HDBNC PLUG STRAIGHT CONNECTORS
- ⑤ HEAT SHRINK TUBE

Characteristics

Cable Diameter: 4.0mm
Max Temperature Range: 80°C
Minimum Bend Radius: 40mm
Jacket Color: Black
RoHS Compliant: Yes
Flame Rating: VW-1

UNIT: mm

CABLE LENGTHS

<0.3m	+25mm/-0mm
>0.3m-1.5m	+50mm/-0mm
>1.5m-3m	+100mm/-0mm
>3m	+150mm/-0mm

Do Not Scale Drawing.

Proprietary Note: Intercon 1 Inc Proprietary Data. The data and information disclosed herein is furnished upon the following understanding and agreement: By acceptance of this document you agree that all rights to the Drawings, Specifications, Processes, and other data contained therein, as well as the proprietary and novel features of the subject matter are reserved by Intercon 1 and disclosed in confidence. They are not to be disclosed to others unless and until expressly authorized by Intercon 1.

Approvals	
R+D	MFG
Intercon 1 by Nortech	
CUSTOMER	DESCRIPTION
INTERCON1	HIGH FLEX CXP12 HDBNC TO HDBNC
PART NUMBER	REVISION
HF-CXP2-xx-P-RA	A
DRAWN BY:	SHEET
Yu Jiang	1 OF 1