

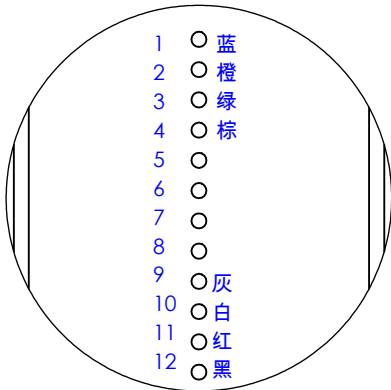
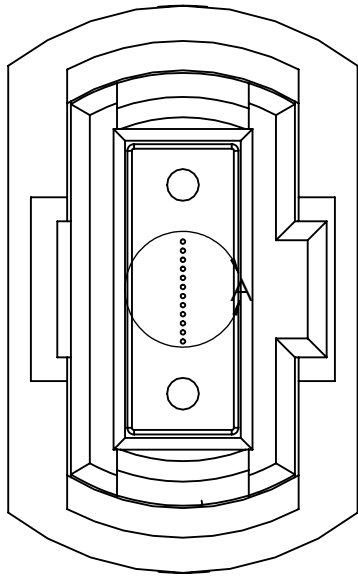


RoHS Compliance
Reach Compliance

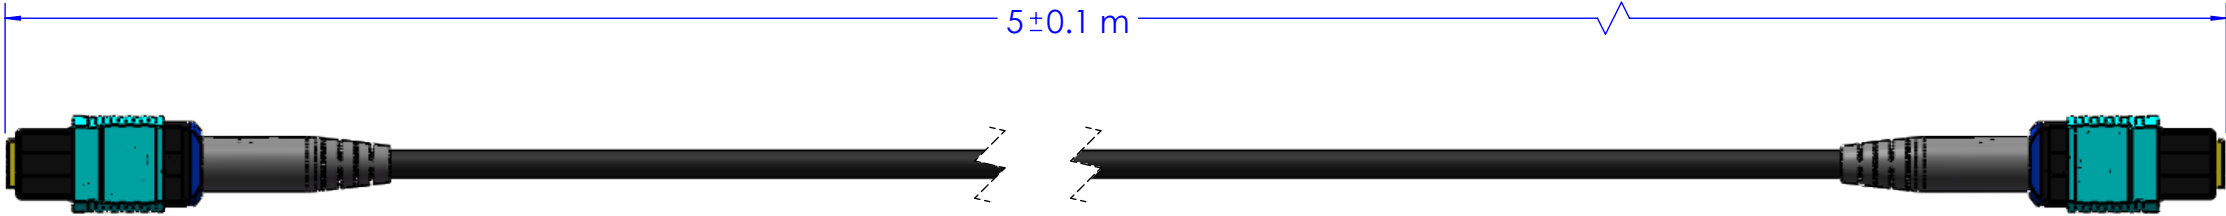

局部视图 A
比例 20 : 1

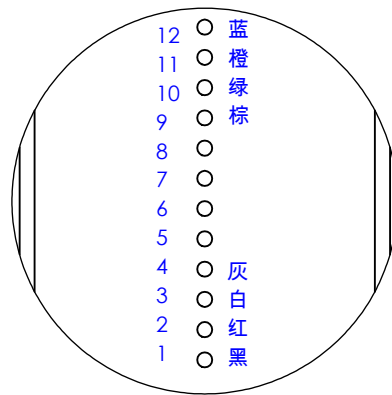

局部视图 B
比例 20 : 1

- Note:
- Optical Fiber cable refer to IEC 60794-3
 - G50/125, OM3 fiber, refer to IEC 70793-2-10 A1a.2
 - MPO connector, refer to IEC 61754-7
 - Polarity refer to TIA 568 B
 - Attenuation < 1.0 dB @ 850nm
 - Dust cap doesn't show on drawing paper

	UNLESS OTHERWISE SPECIFIED TOLERANCE TO BE		A	New					
	<u>LINEAR</u>	<u>ANGULAR</u>	REV	CHANGE		APVD	DATE	ECN No	
Finish(SURFACE & EDGE): DIN ISO 1302 & DIN ISO 13715	X.X ± 0.1 X.XX ± 0.05 X.XXX ± 0.005 X.XXXX ± 0.0005	X° ± 1° X°X' ± 30'	DRAWN	DATE		TITLE: 8G50/125 OM3 MPO/F-MPO/F 5m			WEIGHT:
POSITION TOLERANCE: DIN ISO 1101	MATERIAL		CHECKED	DATE					SCALE: 1:2 FORMAT A3
REF:	DO NOT SCALE		APPROVED	DATE					SHEET 1 OF 1
 THIRD ANGLE PROJECTION	DIMENSIONS IN MILLIMETERS		Part No.		DRAWING No. 3.5mmMPO			-3	