


Item1
Color:White
Size Font:8
Style Times New Roman


P/N
WD #

Print Revision			
REV LETTER	Description	Date	Approval
A	INITIAL RELEASE	2024.3.1	NJ

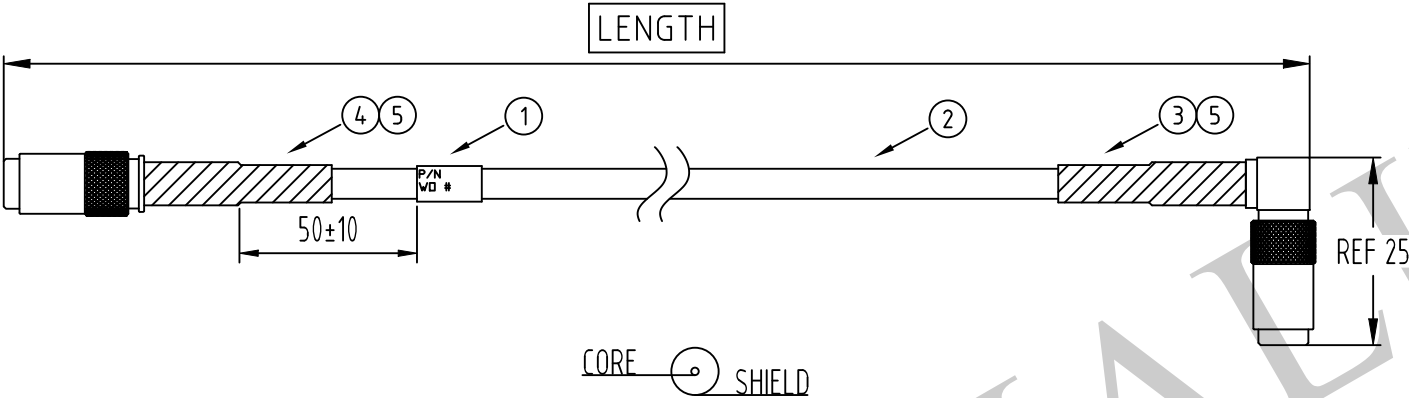

PART NUMBER	LENGTH
MHF-DIN-3.0-DIN-RA	3000mm
MHF-DIN-5.0-DIN-RA	5000mm
MHF-DIN-7.0-DIN-RA	7000mm

Cable label marking

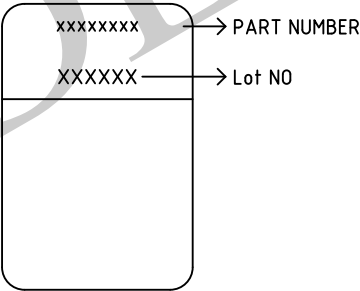

- (1) LABEL
- (2) COAX CABLE
- (3) 1.0/2.3 PLUG RIGHT ANGLE CONNECTORS
- (4) 1.0/2.3 PLUG STRAIGHT CONNECTORS
- (5) HEAT SHRINK TUBE

Characteristics

Cable Diameter: 4.1mm
Max Temperature Range: 80°C
Minimum Bend Radius: 40mm
Jacket Color: Black
RoHS Compliant: Yes
Flame Rating: FT-2

UNIT: mm

CABLE LENGTHS

<0.3m	+25mm/-0mm
>0.3m-1.5m	+50mm/-0mm
>1.5m-3m	+100mm/-0mm
>3m	+150mm/-0mm

Do Not Scale Drawing.

Proprietary Note: Intercon I Inc. Proprietary Data. The data and information disclosed herein is furnished upon the following understanding and agreement: By acceptance of this document you agree that all right to the Drawings, Specifications, Processes, and other data contained therein, as well as the proprietary and novel features of the subject matter are reserved by Intercon I and disclosed in confidence. They are not to be disclosed to others unless and until expressly authorized by Intercon I.



No.3 Building,#218 Sangtian Street Suzhou Industrial Park,China,215123

CUSTOMER		DESCRIPTION	
INTERCON1		MINI FLEX CXP6 DIN TO DIN	
PART NUMBER		REVISION	
MHF-DIN-xx-DIN-RA		A	
DRAWN BY:		SHEET	
Yu Jiang		1 OF 1	